

TEC.MO.
=
Quality
Technology
Innovation


PLASMA CUTTING

The new series of Torches
Hybrid with **EASY FIT**

A revolutionary solution to save time and money



Hand Torches for Heavy-Duty application, with **EASYFIT** connection (Patent Pending)

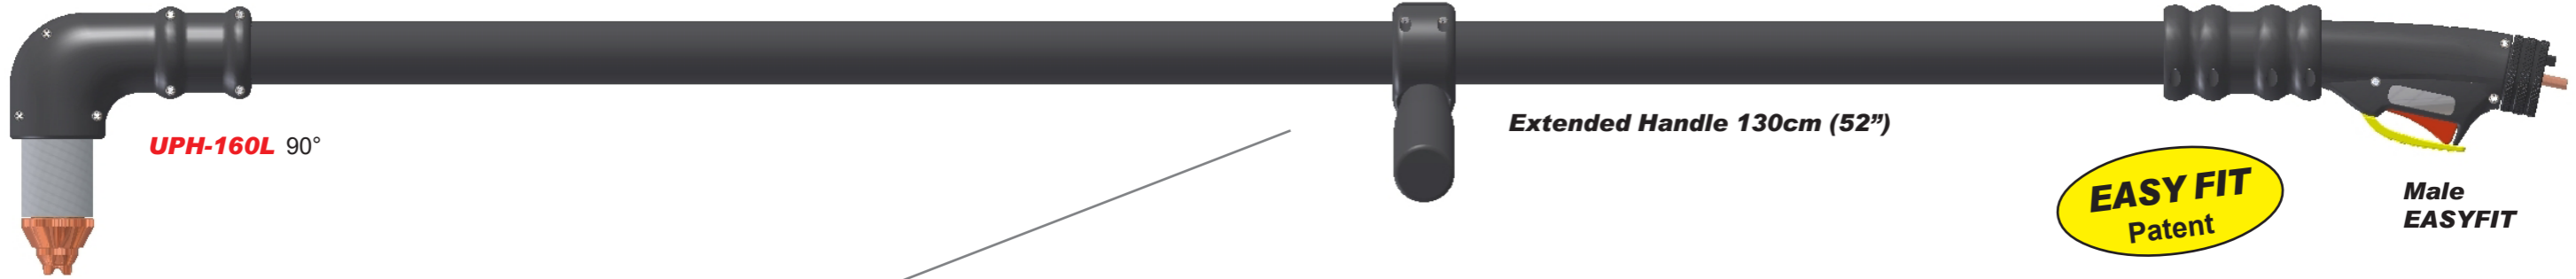

Quality
Technology
Innovation

Torches with standard spare parts. See the UPH torches catalog

- UPH-105L** No high frequency start 105A
- 05831LA Hand torch Heavy-Duty **UPH-105L** 15° 130cm (52\"), EASYFIT connection
 - 05831LB Hand torch Heavy-Duty **UPH-105L** 15° 80cm (31\"), EASYFIT connection
 - 05831LC Hand torch Heavy-Duty **UPH-105L** 90° 130cm (52\"), EASYFIT connection
 - 05831LD Hand torch Heavy-Duty **UPH-105L** 90° 80cm (31\"), EASYFIT connection

- UPH-125L** No high frequency start 125A
- 05931LA Hand torch Heavy-Duty **UPH-125L** 15° 130cm (52\"), EASYFIT connection
 - 05931LB Hand torch Heavy-Duty **UPH-125L** 15° 80cm (31\"), EASYFIT connection
 - 05931LE Hand torch Heavy-Duty **UPH-125L** 45° 130cm (52\"), EASYFIT connection
 - 05931LF Hand torch Heavy-Duty **UPH-125L** 45° 80cm (31\"), EASYFIT connection
 - 05931LC Hand torch Heavy-Duty **UPH-125L** 90° 130cm (52\"), EASYFIT connection
 - 05931LD Hand torch Heavy-Duty **UPH-125L** 90° 80cm (31\"), EASYFIT connection

- UPH-160L** No high frequency start 160A
- 03931LC Hand torch Heavy-Duty **UPH-160L** 45° 130cm (52\"), EASYFIT connection
 - 03931LD Hand torch Heavy-Duty **UPH-160L** 45° 80cm (31\"), EASYFIT connection
 - 03931LA Hand torch Heavy-Duty **UPH-160L** 90° 130cm (52\"), EASYFIT connection
 - 03931LB Hand torch Heavy-Duty **UPH-160L** 90° 80cm (31\"), EASYFIT connection

Extensions and Leads, Coaxial Cable

05286FX-L	Extension 7.5m,	Female EASYFIT 6pins -	Male EASYFIT 6pins
05288FX-L	Extension 15m,	Female EASYFIT 6pins -	Male EASYFIT 6pins
09782FX-L **	Lead assembly 7.5m,	Female EASYFIT 6pins -	Male EURO CONNECTOR 5pins
09787FX-L **	Lead assembly 15m,	Female EASYFIT 6pins -	Male EURO CONNECTOR 5pins
05286FX-HY1	Lead assembly 7.5m,	Female EASYFIT 6pins -	Male HY H-105 connection
05288FX-HY1	Lead assembly 15m,	Female EASYFIT 6pins -	Male HY H-105 connection
05286FX-HY2	Lead assembly 7.5m,	Female EASYFIT 6pins -	Male HY H-125 connection
05288FX-HY2	Lead assembly 15m,	Female EASYFIT 6pins -	Male HY H-125 connection
05286FX-TD	Lead assembly 7.5m,	Female EASYFIT 6pins -	Male TD connection
05288FX-TD	Lead assembly 15m,	Female EASYFIT 6pins -	Male TD connection

** Connection to the system to be confirmed on the purchase order